

	<b>DOCK SKETCH</b>	<b>MAIN DOCK</b>	<b>GANGWAY RAMP</b>
	<b>Dimensions:</b>	10' x 20'	N/A
	<b>#/Size of Stringers:</b>	(9) 2" x 8" Stringers	N/A
P.O. Box 3450 Apollo Beach, FL 33572 Tel: 800.677.4710	<b>Decking Size:</b>	5/4" x 6" or 2" x 6" Decking	N/A
	<b>Decking Type:</b>	P.T. or Composite	N/A

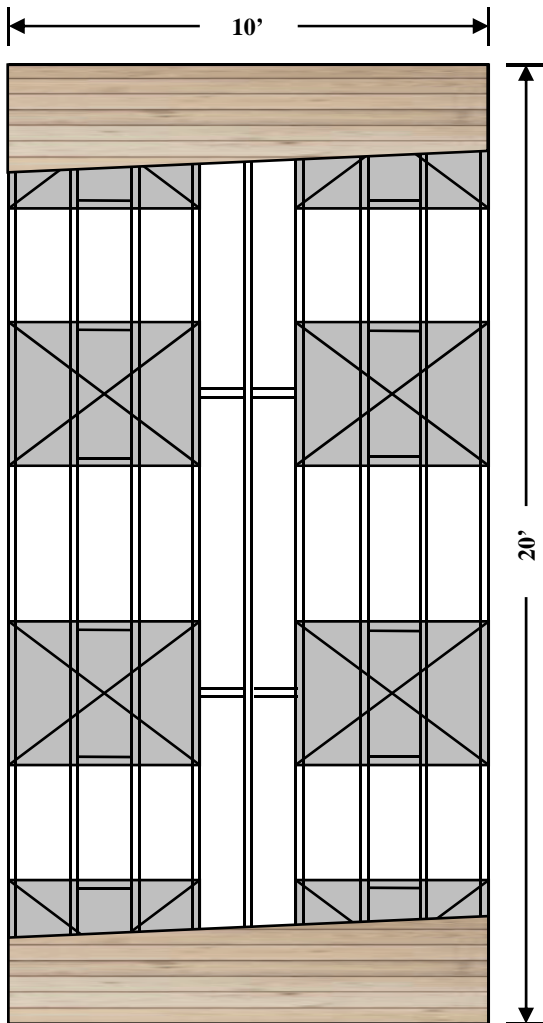

<b><u>FLOTATION SUMMARY</u></b>	
(8)	FD-3416 DockBuilders Float Drums (36" x 48" x 16")
(48)	LB-3804SS (3/8" x 4" Stainless Steel Lag Bolts)
(48)	W-38SSF (3/8" x 1.5" Stainless Steel Fender Washers)
<b><u>FRAMING HARDWARE SUMMARY</u></b>	
(4)	Outside Corners – End
(4)	Inside Corners
(22)	Angles (2 per internal stringer/joist)
(44)	Washer Plates (4 per internal stringer)
(120)	Carriage Bolt Sets (1/2" x 3" bolt/washer/hex nut)
(800)	3" Stainless Steel Decking Screws
(2)	Driver #2 Square (for decking screws)
<b><u>LUMBER SUMMARY (Not Included in Kit)</u></b>	
(2)	2" x 8" x 10' Fascia Board / Header (cut in half)
(9)	2" x 8" x 20' (or 2" x 10" x 20') Stringers / Joists
(43)	5/4" x 6" x 10' or 2" x 6" x 10' Decking Boards
Extra 2" x 8" lumber required for blocking between stringers and over floats.	



36" x 48" x 16" Dock Float  
(Approx. 905# buoyancy)

Note: Dock Builders Supply assumes no responsibility or liability for the design, structural integrity, accuracy or completeness of this sketch/drawing. Sketch is provided as a guide-line only. Dimensions are approximate. Internal stringer blocking over the perimeter of dock floats is not shown, but should be incorporated throughout the frame to provide additional dock float mount points. Dock floats should be on-hand during construction to use as a templates to accurately align internal stringers over the perimeter of floats. Lumber is not included in dock kit and must be acquired locally.